




Digital Panel Meter

數字式電表

數字式電表 DIGITAL PANEL METER

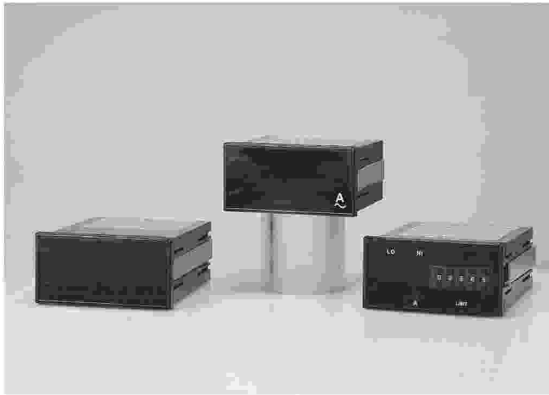

COMMON SPECIFICATIONS

環境溫度 Ambient Temp.: 0 to 50°C
 電源 Power Supply: AC115V/230V,
 50/60Hz, DC40V-70V



顯示器 Display: 0.56" LED
 尺寸 Dimensions: DIN 96*48, DIN72*36
 溫度係數 Temp. Coefficiency: 60 ppm/°C typical

F

Type	Description	Measuring	Accuracy F.S.	Max. reading
DM-31	3 位半數字電表 3 1/2 Digital meter	DCV, DCA, ACV, ACA, Frequency, Ohm, RTD. 4-20mA, 1-5V	DC 0.1% ± 1 digit AC 0.25% ± 1 digit	1999
DM-41	4 位半數字電表 4 1/2 Digital meter		DC 0.1% ± 1 digit AC 0.25% ± 1 digit	1999
SDM-5	轉速顯示電表 Digital RPM Speed Meter (5 Digits Display)	1, 10, 20, 30, 60, 120 Pulse/Revolution of input	±0.02% ± 2 digits	99999
TCM-4T	熱電偶顯示電表 Digital Thermocouple Meter (3 3/4 Display)	J: -200~+760°C K: -130~+1370°C T: -200~+400°C E: -200~+1000°C S: 0~+1760°C R: 0~+1760°C	J, K, E, T: ±0.25% S, R: ±0.4%	3999
DM2436AB	多功能集合式電表 Multi-Function Power Meter	V, A, W, VAR, PF, WH, VARH, Hz	AC/DC 0.1% ± 0.15% W 0.2% ± 0.3%	9999 99999